


NOTE

- Assembly name: Ear Tag Transponder
- Coil lead wires and chip are encapsulated completely
- Solder Wire: lead free (RoHS compliant)
- Inductance value shall be adjusted per batch (Transponders are tuned to a center frequency of 135 2KHz @ Syrma as transponder are 134.2 2KHz after molding)
- IC Chip: EM 4305-330pF packaged in Syrma IC outline 3.4x2.2x0.75

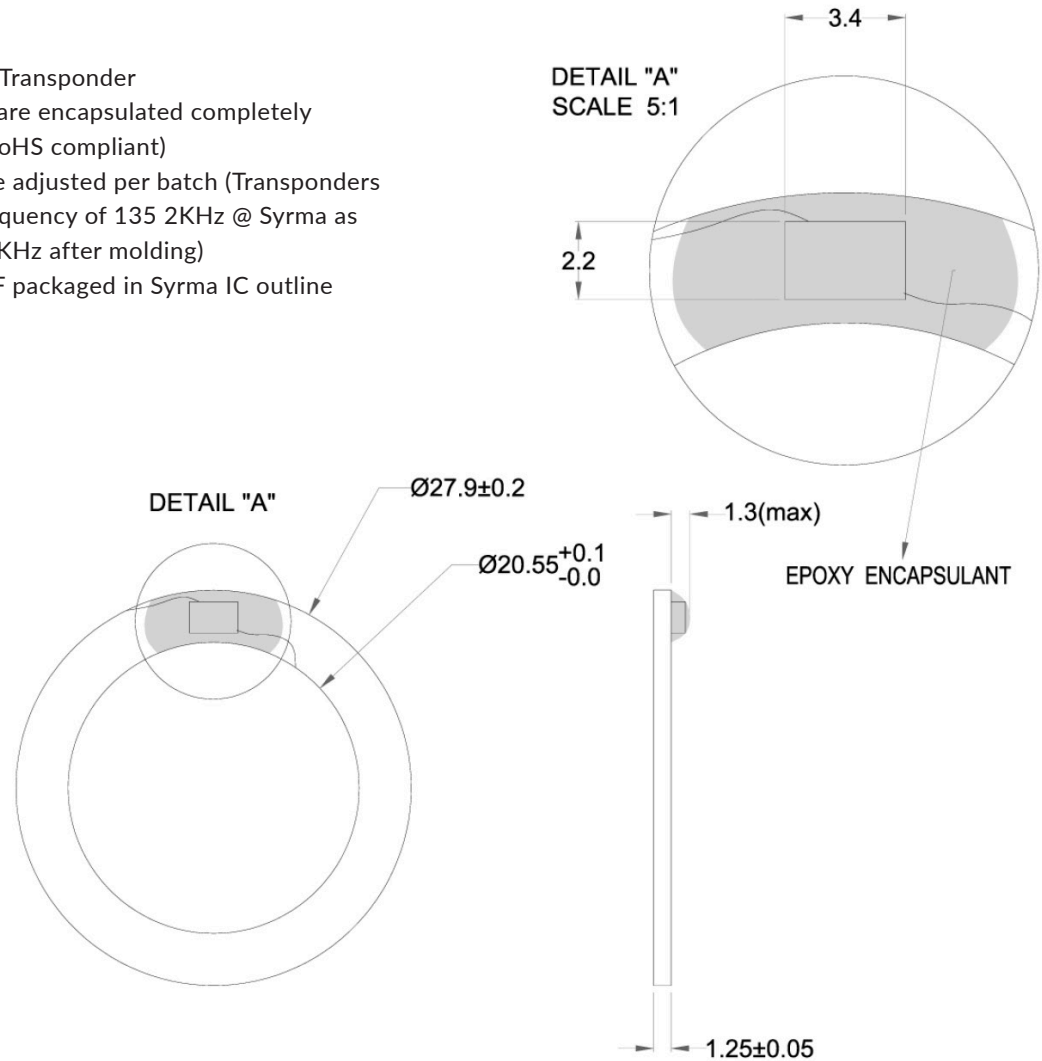

REV. NO.	DATE	NO.	BY	AMENDENTS	
R1	17 May 2012	2	YOGESH	IC packaging and position are changed	
R0	04 Nov 2008	1	MUTHU	Initial release	
DATE	CLEAN	ROUGH	FINE	GRIND	POL / LAP
17 May 2012		▽	▽ ▽	▽ ▽ ▽	▽ ▽ ▽ ▽
DESIGN	DRAWN	CHK	APPR.	SCALE	PROJEC.
MUTHU	YOGESH	MUTHU	SREE	2:1	⊙ ◀
SHEET NO.	DRG NO.				
1 / 1	S-4007				